



# **THERM 5.2 / WINDOW 5.2 NFRC Simulation Manual**

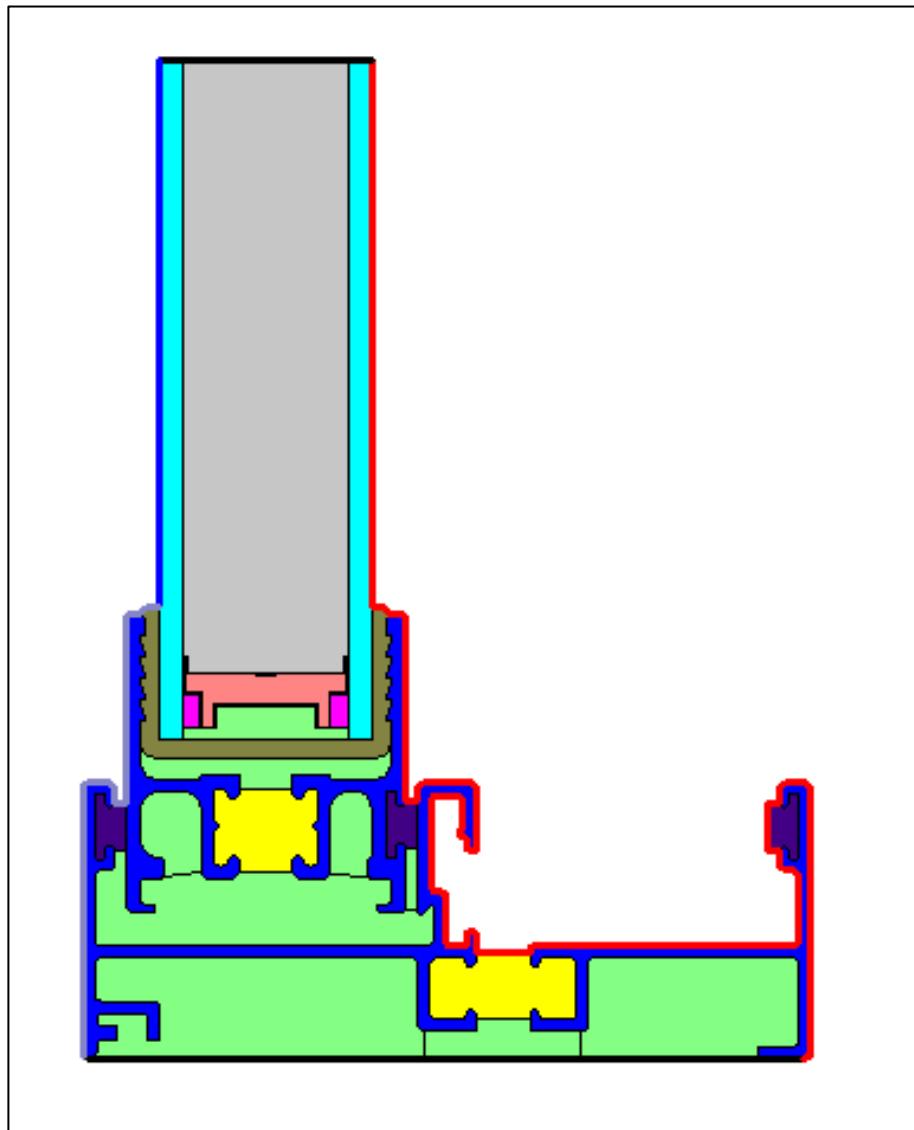

**Lawrence Berkeley National Laboratory**

**JULY 2006**



#### DISCLAIMER

This document was prepared as an account of work sponsored by the United States Government. While this document is believed to contain correct information, neither the United States Government nor any agency thereof, nor The Regents of the University of California, nor any of their employees, makes any warranty, express or implied, or assumes any legal responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product process, or service by its trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof, or The Regents of the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof, or The Regents of the University of California.

Ernest Orlando Lawrence Berkeley National Laboratory  
is an equal opportunity employer.

# THERM 5.2 / WINDOW 5.2 NFRC Simulation Manual

Robin Mitchell, Christian Kohler, and Dariush Arasteh  
Windows and Daylighting Group  
Building Technologies Department  
Environmental Energy Technologies Division  
Lawrence Berkeley National Laboratory  
Berkeley, California 94720  
<http://windows.lbl.gov/software/software.html>

John Carmody  
College of Architecture and Landscape Architecture  
University of Minnesota  
Minneapolis, Minnesota

Charlie Huizenga  
Center for Environmental Design Research  
University of California  
Berkeley, California

Dragan Curcija  
Carli, Inc  
Amherst, Massachusetts

July 2006

© Regents of the University of California

This work was supported by the Assistant Secretary for Energy Efficiency and Renewable Energy, Office of Building Technology, Building Technologies Program of the U.S. Department of Energy under Contract No. DE-AC03-76SF00098.



# Contents

<b>1. INTRODUCTION.....</b>	<b>1-1</b>
1.1. Overview .....	1-1
<b>2. FENESTRATION PRODUCTS .....</b>	<b>2-1</b>
2.1. Overview .....	2-1
2.2 Fenestration Product Sash Operation.....	2-1
2.2.1. Projected or Hinged Windows.....	2-2
2.2.2. Sliding Windows.....	2-2
2.2.3. Sliding Glass Doors .....	2-2
2.2.4. French Doors and Folding Patio Doors .....	2-2
2.2.5. Skylights and Roof Windows.....	2-2
2.3 Performance Implications of Basic Fenestration Types .....	2-3
2.3.1. Hinged Windows.....	2-3
2.3.2. Sliding Windows.....	2-3
2.3.3. Sliding Glass and French Doors.....	2-4
2.4 Frame Materials.....	2-4
2.4.1. Wood Frames .....	2-4
2.4.2. Aluminum Frames.....	2-4
2.4.3. Vinyl Frames .....	2-Error! Bookmark not defined.
2.4.4. Fiberglass and Engineered Thermoplastics.....	2-5
2.4.5. Wood Composites.....	2-5
2.4.6. Hybrid and Composite Frames.....	2-5
2.5 Basic Glazing Materials .....	2-5
2.5.1. Glass .....	2-6
2.5.2. Plastics.....	2-6
2.6 Improved Glazing Products .....	2-7
2.6.1. Tinted Glazing.....	2-7
2.6.2. Reflective Coatings and Films.....	2-8
2.6.3. Double Glazing .....	2-8
2.6.4. Glass Coatings and Tints in Double Glazing .....	2-8
2.6.5. Gap Width in Multiple Glazed Units.....	2-9
2.6.6. Divided Lights.....	2-9
2.6.7. Special Products .....	2-10
2.6.8. Multiple Panes or Films .....	2-10
2.6.9. Low-Emissance Coatings.....	2-11
2.6.9.1. Coating Placement .....	2-12
2.6.9.2. Coating Types.....	2-12
2.6.10. Gas Fills .....	2-13
2.7 Thermally Improved Edge Spacers .....	2-13

<b>3. FENESTRATION HEAT TRANSFER BASICS.....</b>	<b>3-1</b>
3.1. Overview .....	3-1
3.2 Energy Flow Mechanisms .....	3-1
3.3 Temperature Driven Heat Transfer.....	3-2
3.3.1. Conduction .....	3-3
3.3.2. Convection.....	3-3
3.3.3. Radiation.....	3-3
3.3.4. U-factor.....	3-3
3.3.4.1. Total Product U-factor.....	3-4
3.3.4.2. Center-of-Glazing U-factor.....	3-4
3.3.4.3. Edge Effects .....	3-4
3.3.4.4. Frames and Sashes.....	3-4
3.3.4.5. Overall U-factor .....	3-4
3.4 Solar Heat Gain and Visible Transmittance .....	3-5
3.4.1. Determining Solar Heat Gain.....	3-5
3.4.2. Solar Heat Gain Coefficient (SHGC) .....	3-6
3.4.3. Visible Transmittance.....	3-6
3.5 Condensation Resistance .....	3-7
3.5.1. Impact of Glazing Type and Spacers on Condensation.....	3-8
3.5.2. Condensation Resistance .....	3-8
3.5.3. Outdoor Condensation .....	3-9
3.5.4. Condensation Between Glazings .....	3-9
3.6 Infiltration .....	3-9
3.7 Solar Properties of Glazing Materials.....	3-10
3.7.1. Transmittance .....	3-10
3.7.2. Reflectance .....	3-11
3.7.3. Absorptance.....	3-12
3.8 Infrared Properties of Glazing Materials (Emittance).....	3-12
<b>4. SUMMARY OF ALGORITHMS.....</b>	<b>4-1</b>
4.1. THERM and WINDOW Algorithms .....	4-1
4.1.1. WINDOW .....	4-1
4.1.2. THERM: .....	4-1
4.2 WINDOW Computational Method .....	4-1
4.3 THERM Computational Methods.....	4-3
4.4 Total Product Calculations .....	4-5
4.4.1. U-factor.....	4-5
4.4.2. Solar Heat Gain Coefficient (SHGC) .....	4-6
4.4.3. Visible Transmittance.....	4-6
4.4.4. Condensation Resistance .....	4-7
<b>5. MODELING CENTER-OF-GLAZING WITH WINDOW .....</b>	<b>5-1</b>
5.1. Overview .....	5-1
5.2. Glass Library.....	5-2
5.3 Glazing System Library -- Center-of-Glazing U-factor.....	5-4
5.3.1. Environmental Conditions .....	5-7
5.3.2. Coatings .....	5-9
5.3.3. Gas Fill.....	5-10
5.3.4. Laminated Glass / Applied Films.....	5-11

5.4 Solar Heat Gain Coefficient and Visible Transmittance .....	5-11
<b>6. MODELING FRAME AND EDGE HEAT TRANSFER WITH THERM .....</b>	<b>6-1</b>
6.1. Overview .....	6-1
6.2 Cross-Sections to be Modeled .....	6-1
6.3 Draw the Cross Sections.....	6-4
6.3.1. Getting Started – Drawings and DXF Files .....	6-4
6.3.2. File Preferences -- Cross-Section Type.....	6-4
6.3.3. Cross-Section Orientation.....	6-5
6.3.4. What is Not Modeled .....	6-6
6.3.4. What is Not Modeled .....	6-7
6.3.5. Deformable Parts .....	6-7
6.3.6. Frame Cavities.....	6-8
6.3.7. Slightly Ventilated Exterior Cavities.....	6-13
6.3.8. Modeling Sloped and Curved Surfaces .....	6-14
6.3.9. Modeling Sloped Sills.....	6-15
6.4 Importing Glazing Systems .....	6-16
6.4.1. Overview.....	6-16
6.4.2. Inserting Glazing Systems .....	6-17
6.4.3. Multiple Glazing Options.....	6-18
6.4.4. Condensation Resistance .....	6-21
6.5 Defining Boundary Conditions .....	6-24
6.5 Defining Boundary Conditions .....	6-25
6.5.1. Overview.....	6-25
6.5.2. Assigning Boundary Conditions and U-factor Surface Tags.....	6-27
6.5.2. Assigning Boundary Conditions and U-factor Surface Tags.....	6-28
6.5.3. Voids, Overlaps and Bad Points .....	6-31
6.5.3. Voids, Overlaps and Bad Points .....	6-32
6.6 Calculating Results .....	6-33
6.6.1. Meshing.....	6-33
6.6.2. Error Estimator.....	6-33
6.6.3. Required Settings for NFRC Simulations .....	6-35
6.6.4. Calculations .....	6-36
6.6.5. Results .....	6-38
6.6.6. Custom Frame Length.....	6-39
6.6.7. Importing Results into WINDOW.....	6-40
<b>7. TOTAL PRODUCT CALCULATIONS USING WINDOW .....</b>	<b>7-1</b>
7.1. Overview .....	7-1
7.2 Frame and Edge U-factors from THERM .....	7-1
7.3 Center-of-Glazing U-factors from WINDOW .....	7-2
7.4 Overall Product U-factor, SHGC, VT, and CR Calculations .....	7-3
7.4 Overall Product U-factor, SHGC, VT, and CR Calculations .....	7-4
7.4.1. Individual Product SHGC and VT (SHGC 0 & 1, VT 0 & 1) .....	7-6
7.4.2. Whole Product U-factor With Dividers .....	7-9
7.4.2. Whole Product U-factor With Dividers .....	7-10
7.5 Project Databases .....	7-11

<b>8. SPECIAL CASES .....</b>	<b>8-1</b>
8.1. Overview .....	8-1
8.2 Meeting Rails .....	8-2
8.2.1. Modeling Meeting Rails.....	8-2
8.2.2. Steps for Meeting Rail U-factor Calculation.....	8-3
8.2.3. Steps for Meeting Rail Condensation Resistance Calculation .....	8-8
8.3 Dividers .....	8-10
8.3.1. Internal Dividers (Suspended Grilles) .....	8-10
8.3.1.3. Gas Filled Glazing Systems .....	8-20
8.3.2. Simulated Divided Lites .....	8-23
8.3.3. True Divided Lites .....	8-32
8.4 Storm Windows.....	8-40
8.4.1. Modeling Steps.....	8-40
8.4.2. Storm Window Example.....	8-42
8.4.3. Steps for Storm Window Condensation Resistance Calculation	8-46
8.5 Skylights.....	8-49
8.5.1. Skylight Modeling Steps.....	8-49
8.5.2. Skylight Mounting Details.....	8-51
8.5.3. Example Flush Mounted Skylight Problem .....	8-51
8.5.3. Example Flush Mounted Skylight Problem .....	8-52
8.6 Tubular Daylighting Devices .....	8-62
8.6.4. Example Tubular Devices Problem.....	8-66
8.6.5. Example: Tubular Device Problem With the Double-Glazed Diffuser Plate.....	8-75
8.7 Doors.....	8-81
8.8 Spacers.....	8-82
8.8.1. Overview.....	8-82
8.8.2. Linking Glazing Cavity properties (imported from WINDOW) for Open Spacers.....	8-83
8.9 Non Continuous Thermal Bridge Elements .....	8-84
8.9.3. Modeling Steps.....	8-84
8.9.3. Modeling Steps.....	8-85
8.9.4. Equations .....	8-86
8.9.5. Example 1: Bolts in Curtain Wall.....	8-87
8.9.6. Example 2: Thermally slotted cross-section .....	8-90
8.9.6. Example 2: Thermally slotted cross-section .....	8-91
8.9.7. Example 3: Skip-and-debridge:.....	8-94
8.10 Site Built fenestration products (Curtain Walls, Window Walls and Sloped Glazing) .....	8-97
<b>9. SAMPLE PROBLEMS .....</b>	<b>9-1</b>
9.1. Overview .....	9-1
9.2 Problem 1: Vinyl Fixed Window.....	9-2
9.2.1. Description.....	9-2
9.2.2. Glazing Matrix .....	9-2
9.2.3. Center-of-glazing Modeling (WINDOW).....	9-3
9.2.4. Edge-of-glazing and Frame Modeling for U-Factor (THERM) ....	9-4
9.2.5. Total Product U-Factor.....	9-8
9.2.5. Total Product U-Factor.....	9-9
9.2.6. Individual Product SHGC and VT using SHGC 0 & 1 and VT 0 & 1.....	9-11

9.2.7. Drawings Vinyl Fixed Window .....	9-14
9.3 Problem 2: Aluminum Horizontal Slider Window .....	9-16
9.3.1. Description.....	9-16
9.3.2. Glazing Matrix .....	9-17
9.3.3. Center-of-glazing Modeling (WINDOW).....	9-17
9.3.4. Edge-of-glazing and Frame Modeling (THERM).....	9-18
9.3.5. Total Product U-Factor.....	9-27
9.3.6. Individual Product SHGC and VT using SHGC 0 & 1 and VT 0 & 1.....	9-28
9.3.7. Drawings for Aluminum Horizontal Slider.....	9-30
9.4 Problem 3: Skylight.....	9-35
9.4.1. Description.....	9-35
9.4.2. Glazing Matrix .....	9-35
9.4.3. Center-of-glazing Modeling (WINDOW).....	9-36
9.4.4. Edge-of-glazing and Frame Modeling (THERM).....	9-37
9.4.6. Individual Product SHGC and VT using SHGC 0 & 1 and VT 0 & 1.....	9-42
9.4.7. Skylight Drawings.....	9-45
9.5 Problem 4: Door .....	9-46
9.5.1. Description.....	9-46
9.5.2. Glazing Matrix .....	9-46
9.5.3. Center-of-Glazing Modeling (WINDOW).....	9-47
9.5.4. Edge-of-glazing and Frame Modeling for U-Factor (THERM) ..	9-48
9.5.5. Total Product U-Factor, SHGC and VT .....	9-59
9.5.6. Wood Stile and Rail Door Drawings.....	9-59
<b>10. ACKNOWLEDGEMENTS.....</b>	<b>10-1</b>
<b>APPENDIX A. The Application of ISO 15099 to NFRC 100 and 200.....</b>	<b>A-1</b>
<b>APPENDIX B. References .....</b>	<b>B-1</b>



# **1. INTRODUCTION**

---

## **1.1. Overview**

This document, the *THERM 5.2 / WINDOW 5.2 NFRC Simulation Manual*, discusses how to use the THERM and WINDOW programs to model products for NFRC certified simulations and assumes that the user is already familiar with those programs. In order to learn how to use these programs, it is necessary to become familiar with the material in both the *THERM User's Manual* and the *WINDOW User's Manual*.

In general, this manual references the User's Manuals rather than repeating the information.

If there is a conflict between either of the *User Manual* and this *THERM 5.2 / WINDOW 5.2 NFRC Simulation Manual*, the *THERM 5.2 / WINDOW 5.2 NFRC Simulation Manual* takes precedence.

In addition, if this manual is in conflict with any NFRC standards, the standards take precedence. For example, if samples in this manual do not follow the current taping and testing NFRC standards, the standards not the samples in this manual, take precedence.

